

FLEXIBLE HOSE

Union Type Flexible Hose

Fig.GF100



Application

Absorption of the piping strain in the line of water, steam, oil, chemicals, etc., absorption of vibration and ground sinking.

Max. Working Temperature


220°C

Max. Working Pressure

16 and 25 kgf/cm²

Construction

No.	Parts	Materials
1	Union Screw	Non-Asbestos / Stainless Steel
2	Union Nut	Non-Asbestos / Stainless Steel
3	Gasket	Fiber
4	Flexible Tube	Stainless Steel
5	Braid	Stainless Steel

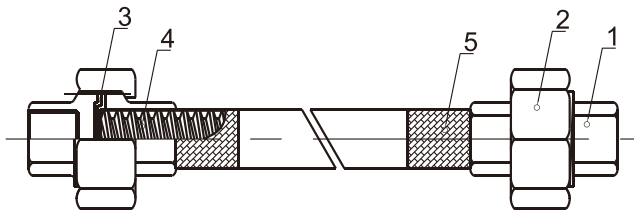

Specification

Nominal Diameter	Overall Length		Lateral Movement	Working Pressure
	DN	inch		
15	1/2	300	25	16
20	3/4	300	25	16
25	1	300	25	16
32	1-1/4	300	20	16
40	1-1/2	300	15	16
50	2	300	20	16

Remarks:

Special length available on request.
Higher pressure rating is available.